



GREWIN INDUSTRIAL GROUP CO.,LTD.

TEL/WhatsApp: +86 18622096679

Mail: admin@coilwindingmachinechina.com

Web:www.coilwindingmachinechina.com




WhatsApp



WeChat

GWPC-870 SQ/UC automatic flat copper wire vertical winding machine

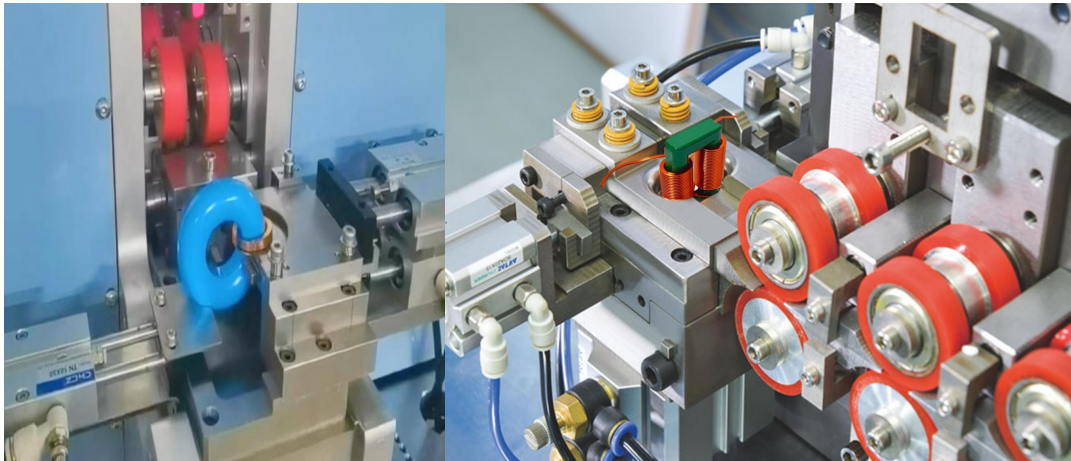

GREWIN INDUSTRIAL GROUP CO.,LTD.

Add: The fourth floor A-A3 zone aviation business area,Dongli Distr,Tianjin,China.



GREWIN INDUSTRIAL GROUP CO.,LTD.

TEL/WhatsApp: +86 18622096679

Mail: admin@coilwindingmachinechina.com

Web:www.coilwindingmachinechina.com



WhatsApp



WeChat

- The equipment adopts universal automatic blanking.
- Wire winding error alarm, wire blocking alarm.
- Dual-shaft high-power pay-off: maximum load 13 kg/shaft.
- Wire diameter applicable range 0.1-0.6mm thickness, width 0.6-2.0mm.
- Automatic universal blanking structure

Electric voltage : 220V

Power rate: 800W-1000W

The machine size: 1500×1000×1200mm

The production capacity : about 800-1000 / hour special machine type is 1500 / hour

Equipment weight : 180KG

- .The product defect rate is less than 3 parts per thousand.
- .Man-machine interface, fault automatic prompt, troubleshooting less than 5 minutes.
- .Dummy module molding design, no need to change the machine debugging, switching machine within 30 minutes to complete.
- .The symmetry of both sides of the product produced is good, and the circle diameter can be controlled within 0.02mm of the error.
- .The single-head line change time is effectively controlled within 5 minutes,(the two-axis line change time is about 10 minutes) the operator can complete the line change and correction Change the type of machine.
- .Equipment maintenance is convenient, the operator can complete the usual maintenance and maintenance of the equipment, ultra-low consumption cost (equipment consumption can be recycled repeatedly Use).
- .Program and equipment split design, can effectively avoid equipment 24 hours operation overload operation caused by machine failure maintenance.
- The transmission power adopts 8 axis simultaneous double combination imported servo motor transmission power precision feed step compensation structure design (corresponding thrust is equal to 16 axes Motor output).

Remark 1

Optional configuration: automatic feeding, material does not grab alarm function, material does not meet the standard alarm function, material error alarm function.

GREWIN INDUSTRIAL GROUP CO.,LTD.

Add: The fourth floor A-A3 zone aviation business area,Dongli Distr,Tianjin,China.